


# Coburn Prima 3F

## Face Fixed Door Closer

Prima | Face Fixed Door Closers  
Coburn Product Data Sheet

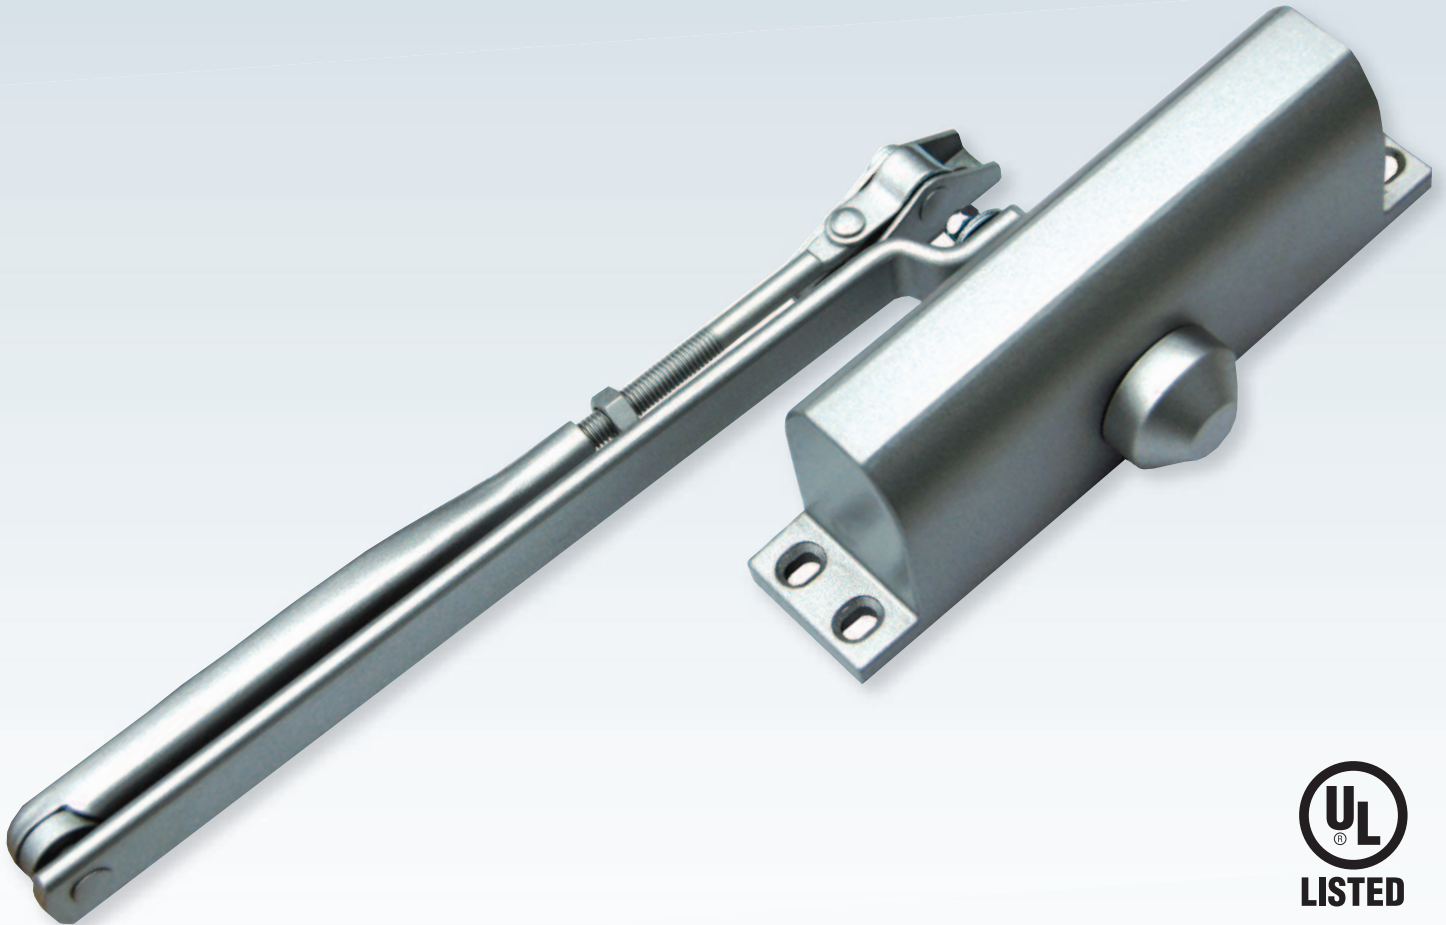

### Features

- High strength die cast aluminium body
- Adjustable closing and latching speeds
- All weather finish for working temperature 55°C to - 42°C
- Standard regular arm and top frame installation
- Parallel arm bracket for parallel arm installation (optional)
- Rack and pinion mechanism
- Non-handed: suitable for left and right hand opening doors
- Back check available as an option

\*The stated maximum door width is for standard installation. In the case of unusually high doors or where the door is located in a draughty or windy position a larger power size of door closer should be used.


### Technical Specifications

- Door Weight: 45 - 60kg
- Maximum Door Width: 950mm\*
- Closing Force: Fixed Size 3
- Dimensions: 178mm x 39mm x 62mm
- UL Certified (R39475)
- HL 10C up to 3 hours fire rating


Connect with 

## Face Fixed Door Closer


### TECHNICAL SPECIFICATION

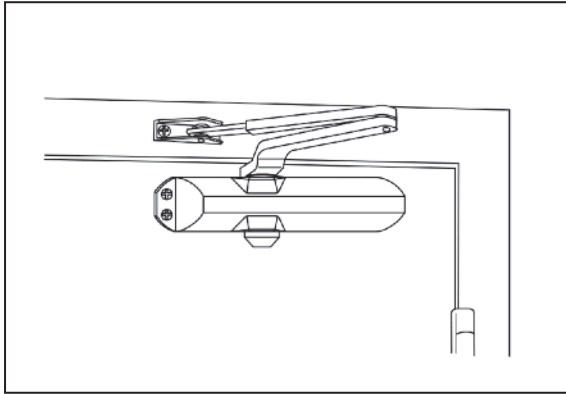

Regular Arm Fixing (Fig. 1)


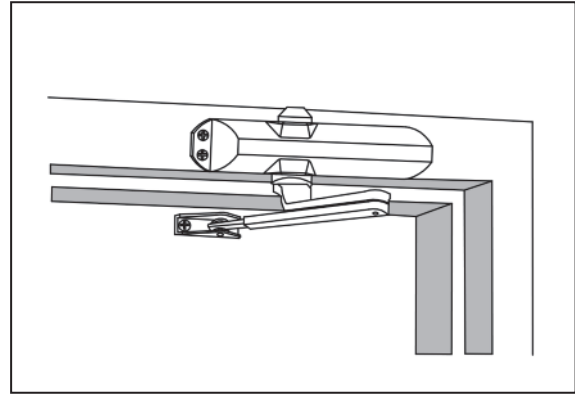


Top Frame Fixing (Fig. 2)

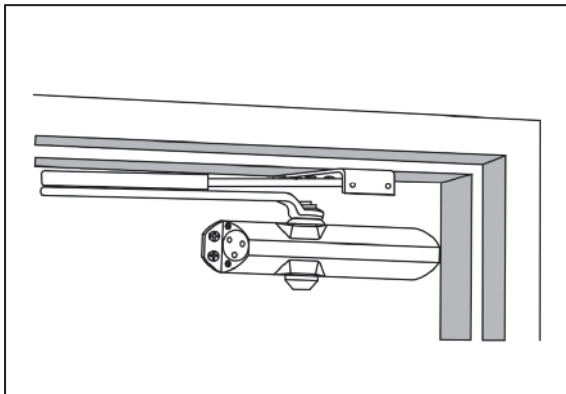

Parallel Arm Fixing (Fig. 3)

- A: Body Length: 178mm
- B: Horizontal Hole Spacing: 165mm
- C: Vertical Hole Spacing: 19mm
- D: Body Height: 39mm
- E: Body Projection: 62mm
- F: Arm Shoe Spacing: 44mm

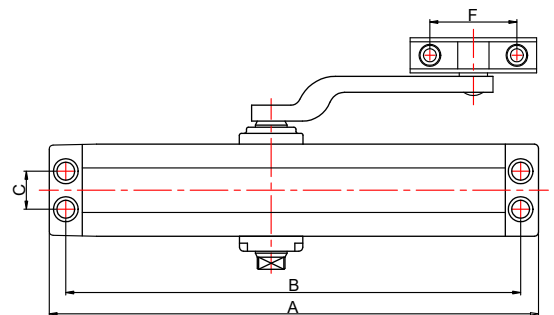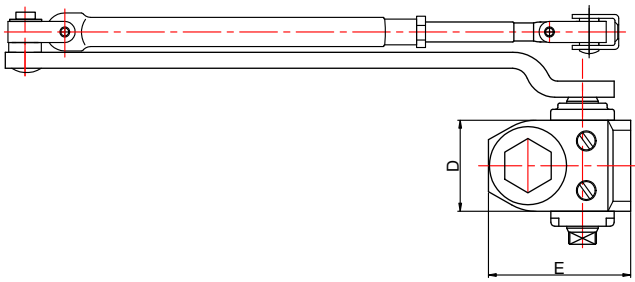

For further information on Coburn products and services:

**Coburn Sliding Systems India PTE Ltd**  
27 Weston Street, Room No 302,  
3rd Floor, Kolkata – 700012. India  
Tel: 91 33 46011916 - 40084842  
sales@coburn.in  
www.coburn.in

**Coburn Sliding Systems Ltd**  
Unit 1 Cardinal West, Cardinal Way,  
Cardinal Distribution Park,  
Godmanchester, Huntingdon,  
Cambridgeshire. PE29 2XN  
United Kingdom  
Tel: +44 (0)20 8545 6680  
sales@coburn.co.uk  
www.coburn.co.uk

Dealer Stamp